



# **NO-DEW ANTI-CONDENSATION** *new*

S e l f - a d h e s i v e   f e l t  
for lamination to ceilings and walls in single-layer laminates




# ANTI-CONDENSATION self-adhesive felt


**NO-DEW anti-condensation** by Barbiflex is an anti-condensation self-adhesive felt for lamination to ceilings and walls in single-layer laminates, ideal to prevent the damage that can cause moisture in buildings, in particular on metal and non-ferrous metals roofs.

Composed of polyester fiber, hot melt adhesive based on synthetic rubber and PE protection foil, **NO-DEW** guarantees, even with a very limited thickness, the maximum absorption of the condensation, in addition to a remarkable microbiological resistance even at extreme temperatures. **NO-DEW** prevents dripping of water from condensation, absorbs noise, resists aging and additional protection against corrosion.


**NO-DEW** is self-adhesive and is applied to the metal panel in the process of profiling, arriving on the construction site ready to be laid directly with the cover panels: simple to operate, long-lasting and, above all, extremely effective.

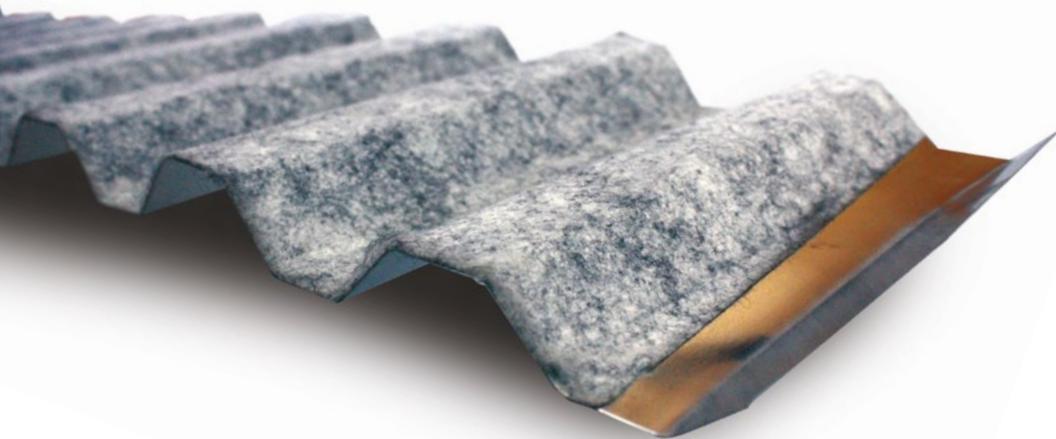


## NO-DEW ANTI-CONDENSATION functions:

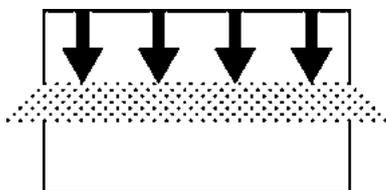

SEPARATION

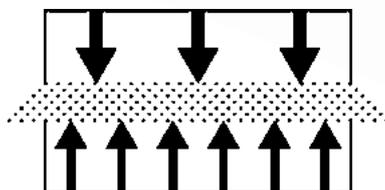


PROTECTION

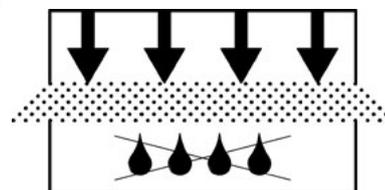

ANTI-CONDENSATION

- 1 During the coupling phase, low temperature or high humidity ambient conditions must be avoided to prevent poor adhesion to the support.
- 2 The material must not be stored at a temperature below 10°C; it is recommended to condition the material at temperature not below 18°C before use.
- 3 The coupling of the product to the support must be carried out immediately after peeling off the PE protective film. Exposing the hot melt glue to dust can decrease its adhesive effectiveness.
- 4 The metallic support should be as clean as possible.
- 5 To maximize the effectiveness of the product (condensation absorption-desorption), it is recommended to install a suitable ventilation system in the room.

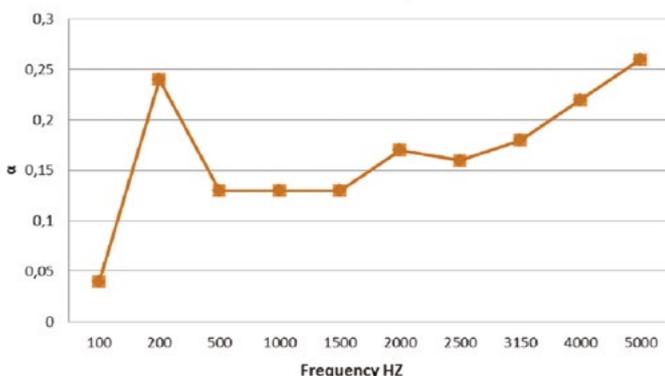

Acoustic absorption

**no dew** *new*

**ANTI-CONDENSATION**  
For lamination to ceilings and  
walls in single-layer laminates

Established in 1978 as a quilted bedding manufacturer, Barbiflex soon became a specialist in the **nonwoven geotextile industry**. Barbiflex has always stood out for the acquisition and development of exclusive, cutting-edge technologies, and for the stringent quality control processes in places, as well as its special attention to environmental matters. In fact, Barbiflex nonwoven fabrics are all completely recyclable; some of them are even biodegradable and biocompostable.

Today, production is divided into 3 divisions:

**GARDEN** mulching and soil protection systems for professionals, individuals and public bodies

**BUILDING AND CIVIL ENGINEERING** waterproofing for buildings, roads, railways, airports, tunnels, refuse sites, etc.

**INDUSTRY** footwear, clothing, vehicles, filtration, housewares, etc.

The whole Barbiflex range is strictly 100% made in Italy, at our works in Carate Brianza, head offices of the company. All products are certified ISO 9001 as well as, where provided, homologated with CE marking.

NO-DEW is a product



Barbiflex - Via Lombardia, 27 - 20841 Carate Brianza MB  
Tel. +39 0362 992342 - Fax +39 0362 991475  
info@barbiflex.it - www.barbiflex.it